COMPETITIVE BLANK PISTOL MODEL BP6001

LOADING, SHOOTING & CARE INSTRUCTIONS

WARNING

This blank pistol is chambered to fire only 209 shotgun primers. This pistol is not to be used with any loaded ammunition containing any type of projectile nor with any powder activated fastening devices. Damage to mechanism caused by shooting without 209 primers in the chambers will not be covered under warranty

TO LOAD

Push the release button (14) located on left side of the frame (1), all the way in to release the cylinder (8). Rotate the cylinder/ejector rod assembly out of frame to expose the five chambers. Load 209 primers into chambers. Securely close cylinder. Be certain that it is closed securely.

То Ѕноот

This pistol will fire in either single or double action mode. For single action, pull hammer (2) all the way back to full cock position then pull the trigger (3) to fire. For double action, with the hammer at rest against the frame, pull the trigger to fire.

TO REMOVE CARTRIDGES

Push the release button (14) located on left side of frame. Rotate the cylinder/ejector assembly (8) out to the left. Push the ejector rod (5) rearward to eject the cartridges.

CARE OF GUN

For many years of dependable service, the gun must be cleaned and oiled periodically and always after each use. Remove powder and dust traces from gun and cylinder chambers and place a drop of oil on all moveable parts. Apply the same oil to a soft cloth and wipe outside of gun for protection against rust.

WARNING

- ALWAYS WEAR SAFETY GLASSES AND HEARING PROTECTION
- HANDLE THIS BLANK REVOLVER AS YOU WOULD ANY FIREARM
- KEEP OUT OF REACH OF CHILDREN
- NEVER AIM AT A PERSON OR ANIMAL

WARNING

Discharging firearms in poorly ventilated areas, cleaning firearms, or handling ammunition may result in exposure to lead and other substances known to the state of California to cause birth defects, reproductive harm, and other serious physical injury. Have adequate ventilation at all times. Wash hands thoroughly after exposure.


> 02/20 AKH 6001 I

WARRANTY

Thirty (30) day limited warranty. You will need to retain an original purchase receipt to validate your warranty. This warranty shall remain in force unless any of the following are determined by the TraditionsTM Customer Service Department: Normal wear from regular and intended use, Failure to comply with the instructions listed here in the owner's manual, Modification of internal parts as they were shipped from the factory, A lack of proper maintenance and thorough cleaning is evident such as rust, customer abuse.

PARTS LIST

- 1. Frame
- 2. Hammer
- 3. Trigger
- 4. Swing-out lever
- 5. Ejector rod assembly
- 6. Sear
- 7. Firing pin assembly
- 8. Cylinder
- 9. Hammer spring
- 10. Trigger spring
- 11. Sear spring
- 12. Ejector disc
- 13. Grips
- 14. CylinderRelease Button

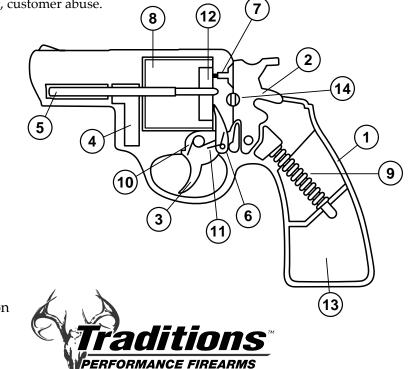

1375 Boston Post Road • P.O. Box 776 • Old Saybrook, CT 06475 • TEL: 860-388-4656 • FAX: 860-388-4657 www.traditionsfirearms.com